

Enafix Red H8B

Printing on bleached CO
Method : Flat Bed Printing

Application Suitability

Exhaust Dyeing	👍
Cold Pad Batch Dyeing	👉
Pad-Dry-Pad-Steam	👉
Pad-Dry-Steam	👉
Alkaline Dischargeability	👎

Keys	👍 = Strongly Recommended	👉 = Recommended
	👎 = Partially Recommended	👎 = Not Recommended

Dyeing Properties

Fixation Temperature(Recommended)	60°C
Salt-free Neutral Water Solubility @ 60°C	100gpl
Solubility in Dyebath with 50 gpl Glauber's Salt	15gpl
Solubility in Dyebath with 80 gpl Glauber's Salt	15gpl
Washing Off Properties	5
I/I Standard Depth	3.20

Light Fastness

S/D	ISO 105-B02
I/12	3-4
I/6	4
I/3	4
I/1	4-5

Chlorinated Water Fastness [20 ppm Active Chlorine]

Standard	Shade Change
ISO 105-E03	4

Washing Fastness






Standard	Shade Change	CO	PA
ISO 105-C06-C2S, @60°C	4-5	4-5	4-5
ISO 105-C06-C2S, @60°C, 5X	4-5	4-5	4-5
AATCC TM 61-3A, @70°C	4-5	4-5	4-5

Water Fastness

Standard	Shade Change	CO	WO
ISO 105-E01	4-5	4	4

Perspiration Fastness

Standard	Treatment Type	Shade Change	CO	WO
ISO 105-E04	Alkaline	4-5	4	4
ISO 105-E04	Acidic	4-5	4-5	4

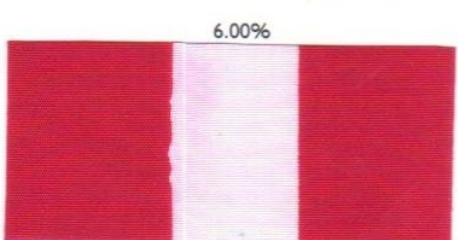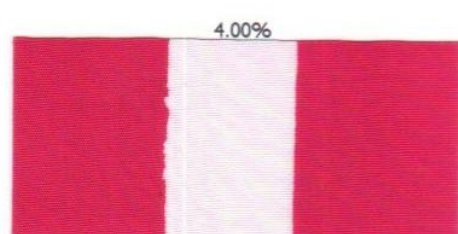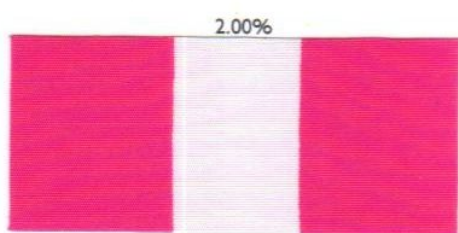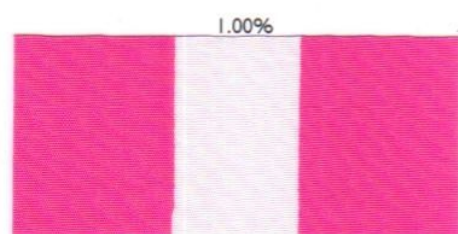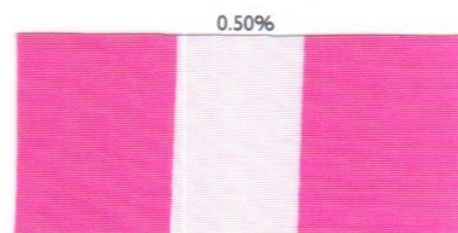

Enafix Orange H2R

Printing on bleached CO
Method : Flat Bed Printing

Application Suitability

Exhaust Dyeing	👍
Cold Pad Batch Dyeing	👎
Pad-Dry-Pad-Steam	👎
Pad-Dry-Steam	👎
Alkaline Dischargeability	👎

👍 Strongly Recommended	👎 Recommended
👎 Partially Recommended	👎 Not Recommended

Dyeing Properties

Fixation Temperature(Recommended)	60°C
Salt-free Neutral Water Solubility @ 60°C	100gpl
Solubility in Dyebath with 50 gpl Glauber's Salt	15gpl
Solubility in Dyebath with 80 gpl Glauber's Salt	15gpl
Washing Off Properties	5
I/I Standard Depth	3.20

Light Fastness

S/D	ISO 105-B02
I/12	3-4
I/6	4
I/3	4
I/1	4-5

Chlorinated Water Fastness [20 ppm Active Chlorine]

Standard	Shade Change
ISO 105-E03	4

Washing Fastness







Standard	Shade Change	CO	PA
ISO 105-C06-C2S, @60°C	4-5	4-5	4-5
ISO 105-C06-C2S, @60°C, 5X	4-5	4-5	4-5
AATCC TM 61-3A, @70°C	4-5	4-5	4-5

Water Fastness

Standard	Shade Change	CO	WO
ISO 105-E01	4-5	4	4

Perspiration Fastness

Standard	Treatment Type	Shade Change	CO	WO
ISO 105-E04	Alkaline	4-5	4	4
ISO 105-E04	Acidic	4-5	4-5	4

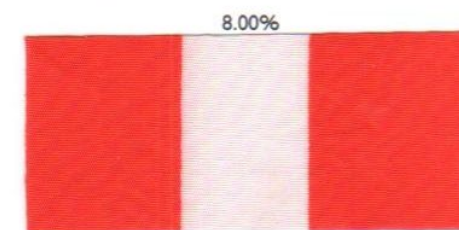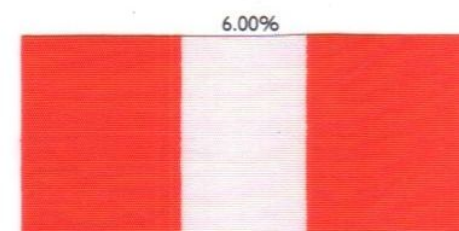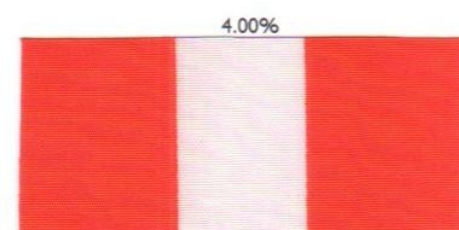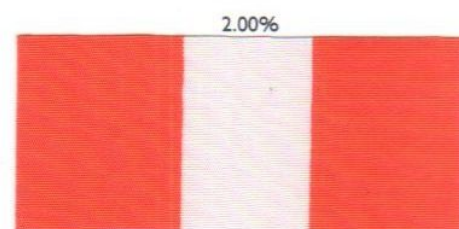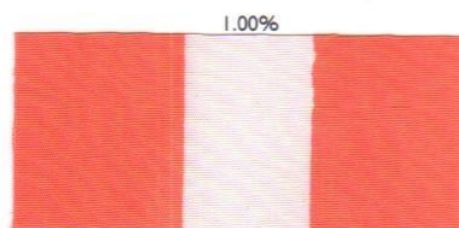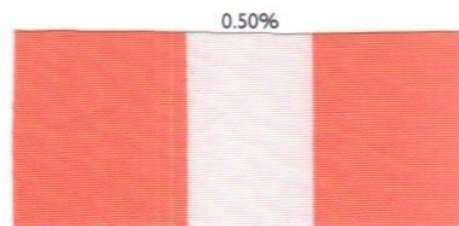

Enafix Blue P3R

Printing on bleached CO
Method : Flat Bed Printing

Application Suitability

Exhaust Dyeing	👍
Cold Pad Batch Dyeing	👉
Pad-Dry-Pad-Steam	👉
Pad-Dry-Steam	👉
Alkaline Dischargeability	👎

Keys	👍 = Strongly Recommended	👉 = Recommended
	👎 = Partially Recommended	👎 = Not Recommended

Dyeing Properties

Fixation Temperature(Recommended)	60°C
Salt-free Neutral Water Solubility @ 60°C	100gpl
Solubility in Dyebath with 50 gpl Glauber's Salt	15gpl
Solubility in Dyebath with 80 gpl Glauber's Salt	15gpl
Washing Off Properties	5
I/I Standard Depth	3.20

Light Fastness

S/D	ISO 105-B02
I/12	3-4
I/6	4
I/3	4
I/1	4-5

Chlorinated Water Fastness [20 ppm Active Chlorine]

Standard	Shade Change
ISO 105-E03	4

Washing Fastness

Standard	Shade Change	CO	PA
ISO 105-C06-C2S, @60°C	4-5	4-5	4-5
ISO 105-C06-C2S, @60°C, 5X	4-5	4-5	4-5
AATCC TM 61-3A, @70°C	4-5	4-5	4-5

Water Fastness

Standard	Shade Change	CO	WO
ISO 105-E01	4-5	4	4

Perspiration Fastness

Standard	Treatment Type	Shade Change	CO	WO
ISO 105-E04	Alkaline	4-5	4	4
ISO 105-E04	Acidic	4-5	4-5	4

